

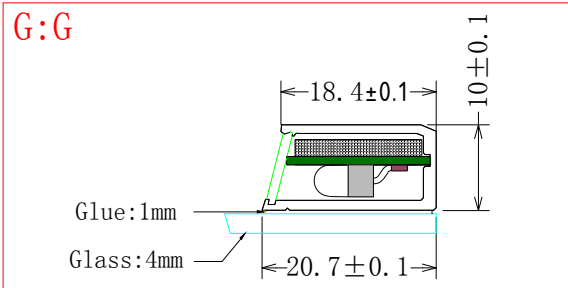


|         |                    |      |        |
|---------|--------------------|------|--------|
| Version | Reasons for change | DATE | Design |
|         |                    |      |        |

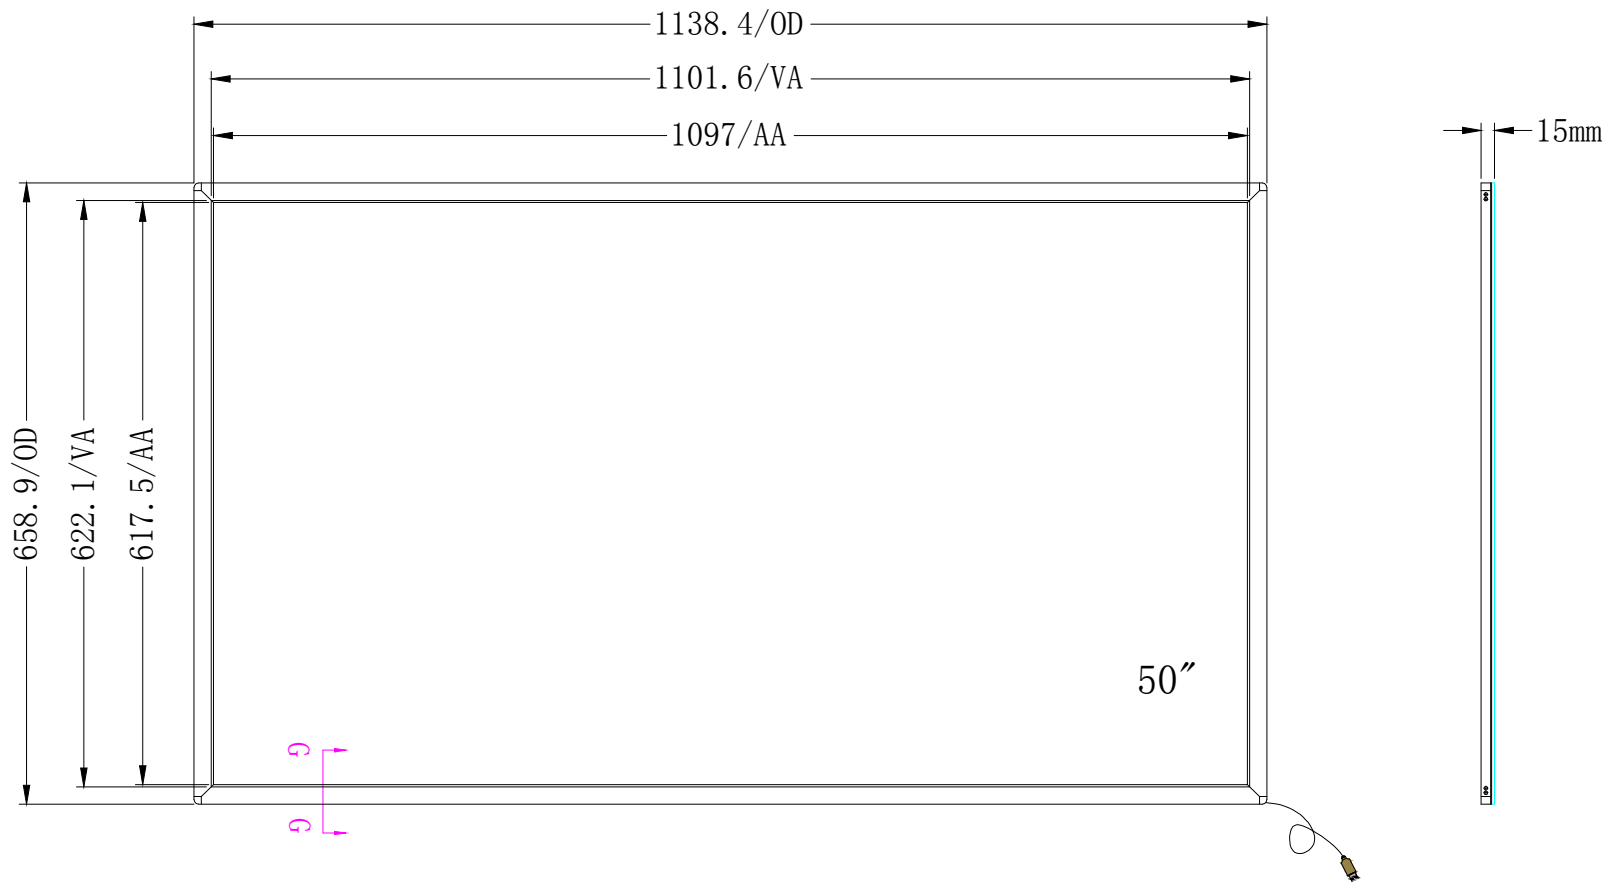

TOLERANCES  
(UNLESS OTHERWISE STATED)

| DECIMALS          | ANGLES  |
|-------------------|---------|
| >2000mm           | ±2.00mm |
| 1600 < X ≤ 2000mm | ±1.20mm |
| 1200 < X ≤ 1600mm | ±0.80mm |
| 800 < X ≤ 1200mm  | ±0.50mm |
| 400 < X ≤ 800mm   | ±0.30mm |
| 120 < X ≤ 400mm   | ±0.20mm |
| 30 < X ≤ 120mm    | ±0.20mm |
| ≤ 30mm            | ±0.15mm |



|            |                  |          |            |
|------------|------------------|----------|------------|
| <b>50"</b> |                  |          |            |
| Model No:  | <b>IR5000-KR</b> | Size:    | 50"        |
| Ratio:     | 16:9             | Unit:    | mm         |
| Design:    |                  | DATE:    | 2018.12.06 |
| Scale:     | 1:1              | Version: |            |
| Page:      | 1/1              |          |            |