
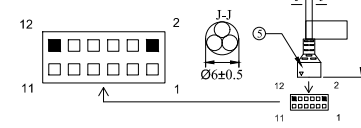


I H G F E D C B A

Top View

Side View

Bottom View

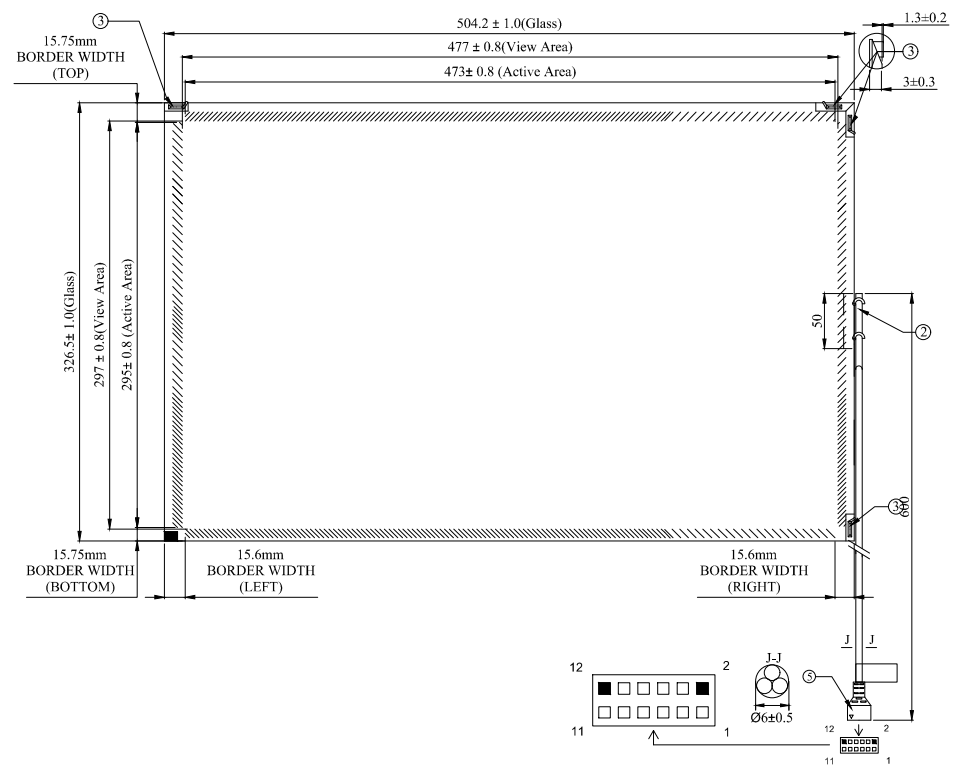

CONNECTION CHART			
PIN	SIGNAL	INSULATION COLOR	JACKET COLOR
1	GROUND	OVERALL SHIELD	
2	KEY		
3	Y RECEIVE+	BLU	BLK
4	Y TRANSMIT+	BLU	GRY
5	Y RECEIVE-	BLK	BLK
6	Y TRANSMIT-	YEL	GRY
7	GROUND	INNER SHIELD	
8	X TRANSMIT-	RED	RED
9	X RECEIVE-	RED	BLK
10	X TRANSMIT+	GRN	RED
11	X RECEIVE+	WHT	BLK
12	KEY		

- NOTES:
- ALL DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS SHOWN ARE PROJECTED DISTANCES.
 - GLASS THICKNESS: 4.0±0.3mm NOMINAL.
 - TRANSDUCERS ARE LOCATED AT THE POSITIONS SHOWN. GLASS IS BEVELED UNDER TRANSDUCERS. HEIGHT OF TRANSDUCERS ABOVE GLASS: 1.3mm MAXIMUM.
 - CABLE ROUTING ADDS A MAXIMUM OF 2.5mm AS INDICATED ON THE SCREEN. CABLE IS ROUTED ALONG THE BEVEL.
 - LINE 14-6CX-XXX, WITH 2x6 HOUSING RECEPTACLES, CONNECT TO
 ----SAW SERIAL CONTROL BOARD SAW232(6000S)
 ----SAW USB CONTROL BOARD SAWUSB (6000U)
 - THE TOUCH ACTIVE AREA IS LESS THAN THE VIEWABLE AREA TO FACILITATE SEALING.

							MODEL SAW2200-KR	PROJECTION
							DESCRIPTION	SIZE: A4
							22"	SCALE 1:1
							ASPECT RATIO 16:10	WEIGHT: 0.46 Kg
								COLOR:
A	FIRST ISSUE	20-9-26	Kevin	BING	CLOUD	DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: LINEAR TOL: .X=±1.0 .XX=±0.5 ANGULAR TOL: ±1°		
REV.	DESCRIPTION	DATE	DRAW	CHECK	APPROVE	DRAWING NO.:		
							SHEET 1 OF 1	REV. A

I H G F E D C B A